



# FACT SHEET

## Juneau: Douglas Bridge & Highway Resurfacing & Sidewalk Repairs

Project No. SFHWY00058  
Federal Project No. 0958032

### Project Description

The Alaska Department of Transportation & Public Facilities (DOT&PF) are working on a design to improve and resurface approximately 2.5 miles of Douglas Highway from St. Ann's Avenue to Egan Drive including upgrades to the roundabout and bridge surface. The project will repair various elements of the existing road infrastructure such as sidewalks and curbs, culverts and drainage, and signage.

The primary objectives of the project are:

- prolong the life of Douglas Highway's road surface
- maintain adequate drainage features
- bring the pedestrian facilities into compliance with the Americans with Disabilities Act (ADA)

### Proposed Improvements

- Reconstruct pedestrian ramps, driveways and sidewalks to be ADA compliant
- Reconstruct 3rd Street from St. Ann's Avenue to I Street
- Resurface Douglas Highway from I Street to Egan Drive
- Resurface the roundabout
- Resurface Douglas Bridge and level existing bridge joints
- Repair some structural retaining walls and replace damaged handrails
- Upgrade highway guardrail
- Upgrade sign supports
- Replace striping – new striping will match existing striping
- Upgrade drainage

### Cost & Funding

This project is funded by federal receipts through the Preventative Maintenance program. The project is expected to cost approximately \$15-20 million (including utility relocations, Right-of-Way acquisition, and construction costs).

### Project Schedule

Preliminary Design	Summer 2019
Agency Permits, Final Design, Right of Way Acquisition, and Utility Agreements	Winter 2019
Begin Construction	Spring 2021
End Construction	End of 2023




[DouglasHwy@dowl.com](mailto:DouglasHwy@dowl.com)

Watch for updates on the web at: [www.dot.alaska.gov/sereg/projects/douglashwy](http://www.dot.alaska.gov/sereg/projects/douglashwy)


Last updated: May 2019

# Proposed Typical Cross-Sections


## ST. ANN'S AVENUE TO I STREET

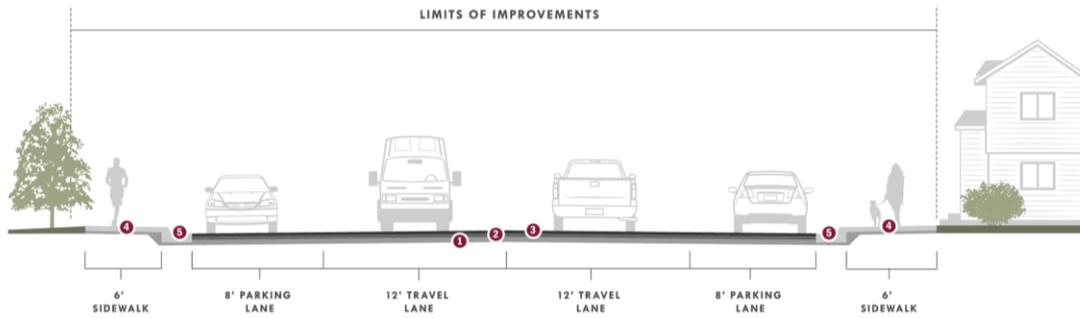

## I STREET TO CORDOVA STREET

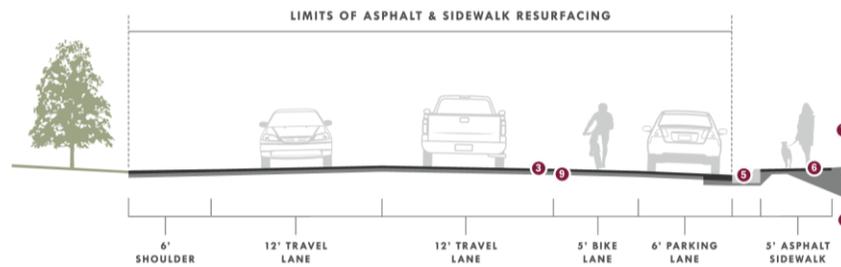

## DOUGLAS BRIDGE

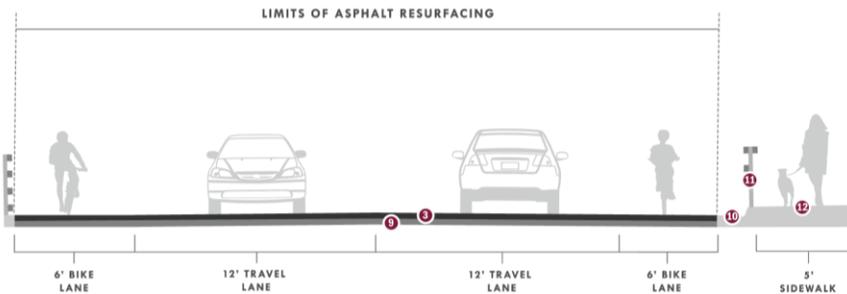

LEGEND		
1 Aggregate Base Course	6 Replace Existing Curb and Gutter	9 Existing Asphalt
2 Asphalt Treated Base	7 Replace Existing Asphalt Sidewalks	10 Existing Curb and Gutter to Remain
3 Asphalt Pavement	8 Replace Existing Steel Railing	11 Existing Railing and Guardrail to Remain
4 Replace Existing Concrete Sidewalk with New Concrete Sidewalk	9 Repairs to Existing Retaining Walls	12 Existing Concrete Sidewalk to Remain
		13 Existing Bridge Railing to Remain

For more information contact:

**David Pyeatt, P.E.**

DOT&PF Project Manager

(907) 465-4490



**Jovie Garcia**

DOWL Project Administrator

(907) 562-2000



[DouglasHwy@dowl.com](mailto:DouglasHwy@dowl.com)

Watch for updates on the web at: [www.dot.alaska.gov/sereg/projects/douglashwy](http://www.dot.alaska.gov/sereg/projects/douglashwy)

Last updated: May 2019