

Pivot


Collection	Art + Science	
Style Number	4499V	
Construction	Heavy Commercial Pvc-Free Ecoworx Resilient	
Class / ASTM F1700	ASTM F06 (In Development)	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	8 in w x 51 in l	21 cm w x 129 cm l
Actual Dimensions	8.27 in w x 50.79 in l	21.01 cm w x 129.01 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Micro-Bevel	
Installation Type	Dry Back	
Recommended Adhesive	4200 Resilient Adhesive (1 gal) or 4200 Resilient Adhesive (4 gal)	

Packaging

Pieces per Carton	16 pcs	
Area per Carton	46.65 sq ft	4.33 sq m
Weight per Carton	36.431 lbs	16.52 kg



Recommended Installation Method

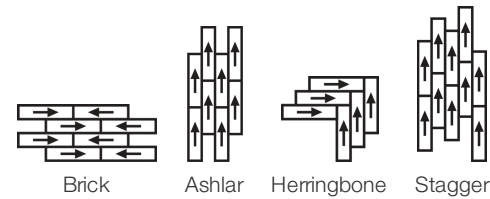

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *2500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.	
Resistance to Heat (ASTM F1514)	Passes		
Resistance to Light (ASTM F1515)	Passes		
Resistance to Chemicals (ASTM F925)	Passes		
Radiant Panel (ASTM E648)	Passes, Class I		
Coefficient of Friction (ASTM D2047, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes		
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.			

Warranties

- [1 Year Commercial Limited Warranty](#)
- [25 Year Commercial System Warranty](#)

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure
Declare | LBC Compliant

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Embodied Carbon (Cradle to Gate)

5.21 Kg CO₂/M²

Life-Cycle Carbon Emissions

Carbon Neutral

Total Recycled Content

25% (Pre-Consumer 0% | Post-Consumer 25%)

Global Product Assessment

Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.

Greenguard (Certification, Gold, Private Label) | Certified

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

Absence of Heavy Metals

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

Absence of Halogenated Flame Retardants

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

Ortho-Phthalates Free

X11 Long Term Emissions Control
Part 2: Flooring Optimization

Green Guard Gold Certified

X14 Material Transparency
Part 1: Promote Ingredient Disclosure Optimization

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 1000 Ppm Disclosure

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

Environmental Guarantee

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Greenguard Gold Certified

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).

- [Installation Guidelines](#)
- [Maintenance Guidelines](#)

Please visit [www.shawcontract.com](#) for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](#) for more information.

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

Available Colorways



Reform 00111
V3 - Moderate Variation



Mindset 00115
V2 - Slight Variation



Reclaim 00121
V2 - Slight Variation



Climate 00125
V2 - Slight Variation



Reuse 00140
V2 - Slight Variation



Value 00144
V3 - Moderate Variation



Renew 00155
V3 - Moderate Variation



New Growth 00240
V2 - Slight Variation



Change 00504
V4 - Substantial Variation



Resilience 00570
V3 - Moderate Variation



Process 00575
V2 - Slight Variation



Native 00720
V2 - Slight Variation



Ecology 00730
V2 - Slight Variation



Earthen 00740
V3 - Moderate Variation



Future 00750
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

