


This document is the absolute property of R&M. This document must not be copied without the written permission of R&M. No part of this document may be reproduced for any purpose. Reproduction in whole or in part without the written permission of R&M is prohibited. Copyright will be prosecuted.

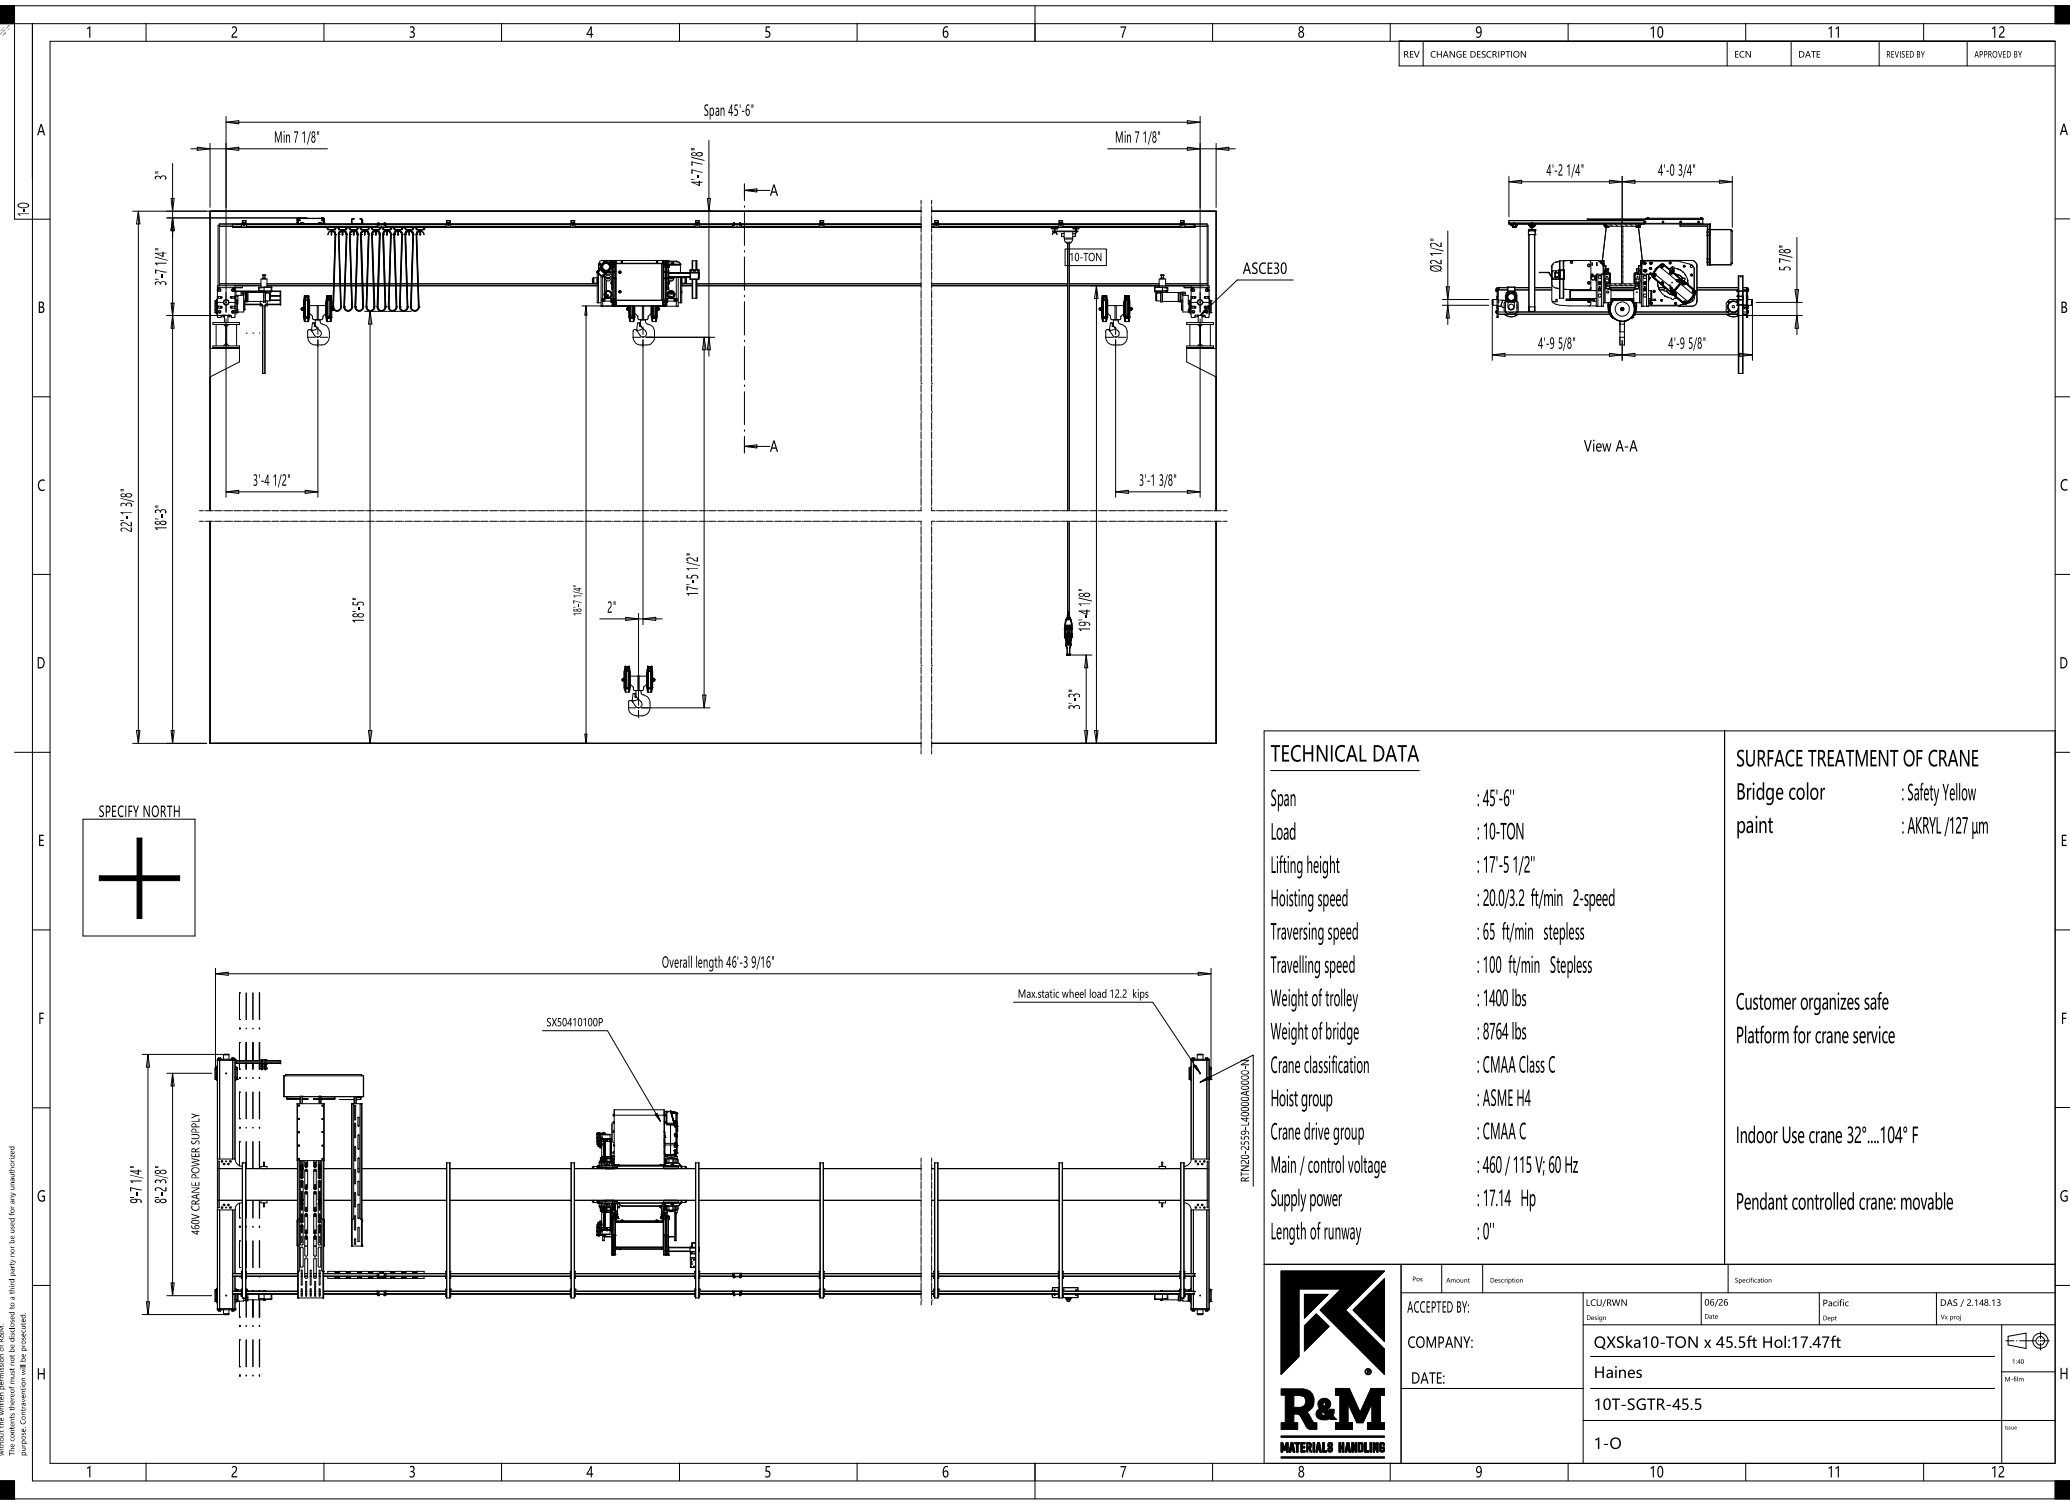

TECHNICAL DATA

Span	: 45'-6"
Load	: 10-TON
Lifting height	: 17'-5 1/2"
Hoisting speed	: 20.0/3.2 ft/min 2-speed
Traversing speed	: 65 ft/min stepless
Travelling speed	: 100 ft/min Stepless
Weight of trolley	: 1400 lbs
Weight of bridge	: 8764 lbs
Crane classification	: CMAA Class C
Hoist group	: ASME H4
Crane drive group	: CMAA C
Main / control voltage	: 460 / 115 V; 60 Hz
Supply power	: 17.14 Hp
Length of runway	: 0"

SURFACE TREATMENT OF CRANE

Bridge color	: Safety Yellow
paint	: AKRYL / 127 µm

Customer organizes safe
Platform for crane service


Indoor Use crane 32° ... 104° F

Pendant controlled crane: movable



Pos	Amount	Description	Specification			
ACCEPTED BY:		LCU/RWN	06/26	Pacific	DAS / 2.148.13	
COMPANY:		Design	Date	Dept	Via proj	
DATE:		QXSka10-TON x 45.5ft Hol:17.47ft				
		Haines				
		10T-SGTR-45.5				
		1-O				

This document is the absolute property of R&M. This document must not be copied without the written permission of R&M. This document is to be used for any unauthorized purpose. Reproduction in any form without the written permission of R&M is prohibited. Copyright will be prosecuted.

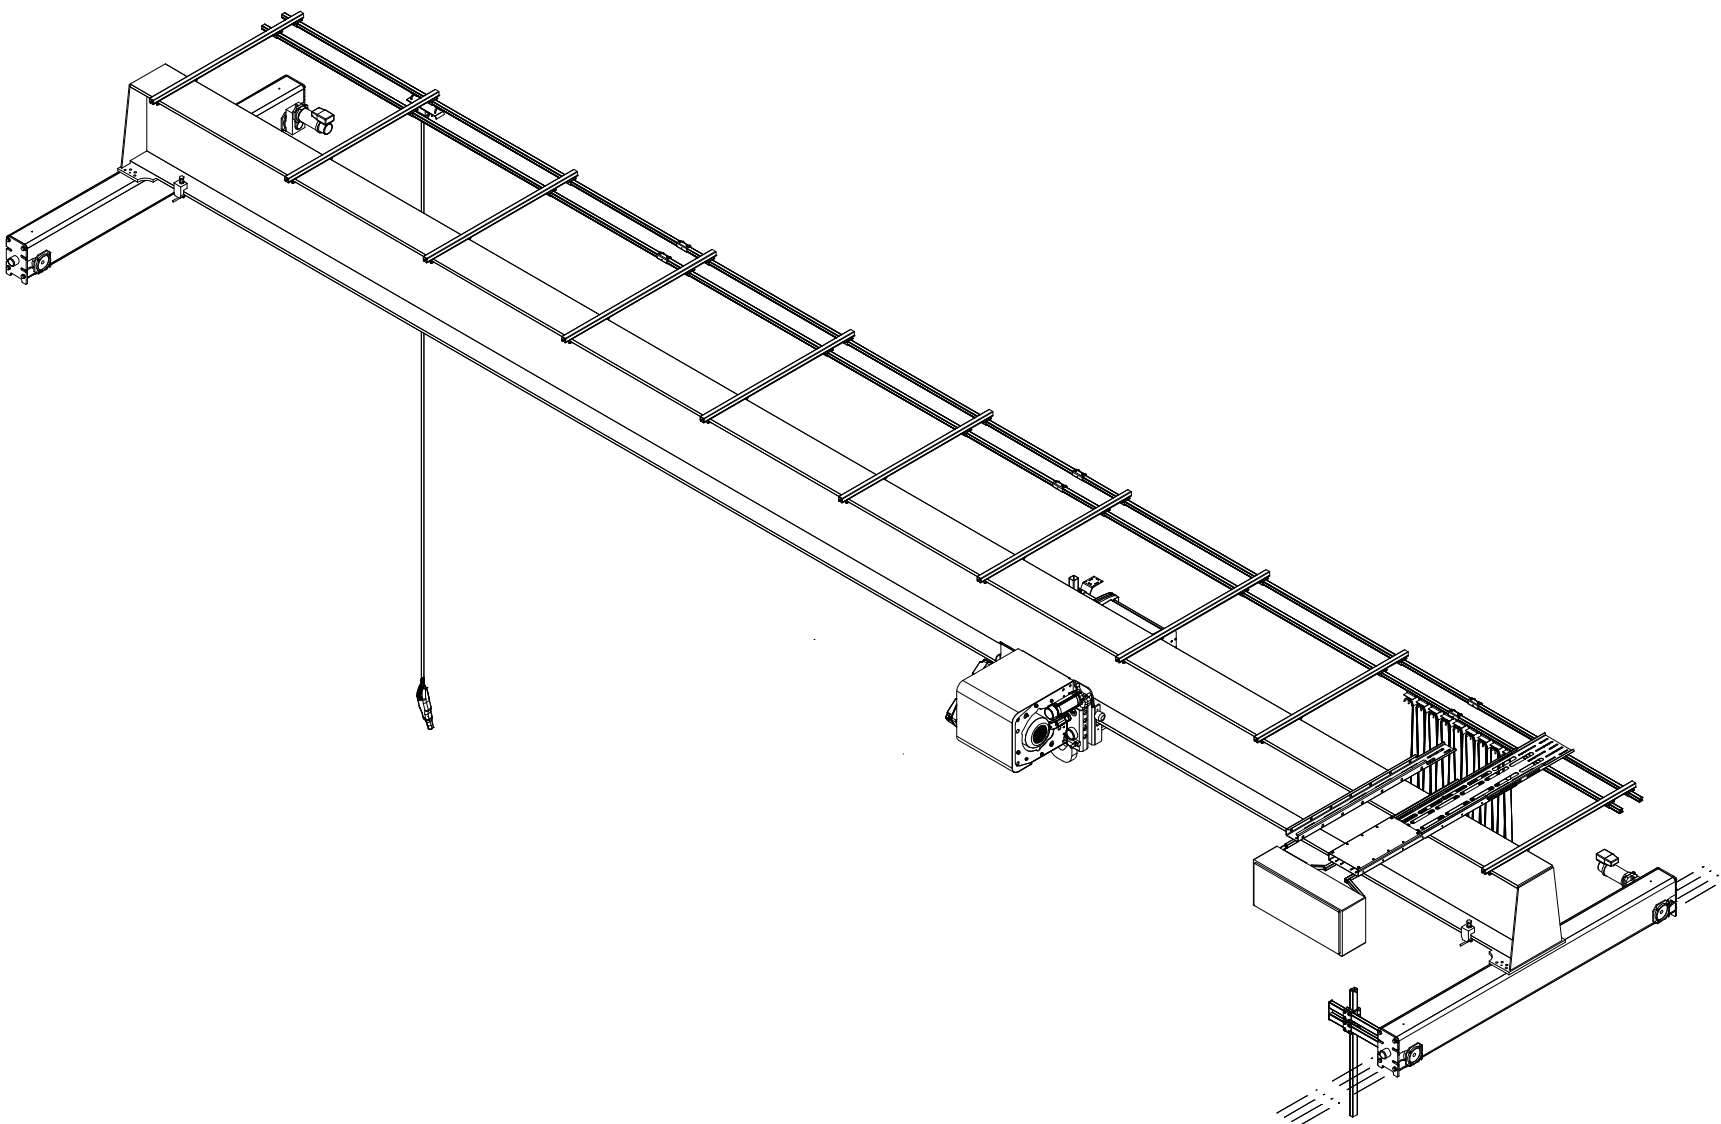

	Pos	Amount	Description	Specification				
	ACCEPTED BY:			LCU/RWN	06/26	Pacific	DAS / 2.148.13	
	COMPANY:			Design	Date	Dept	Via proj	
	DATE:			QXSka10-TON x 45.5ft Hol:17.47ft				
				Haines				 1:40 M-Rm
				10T-SGTR-45.5				
				1-OI				Room