

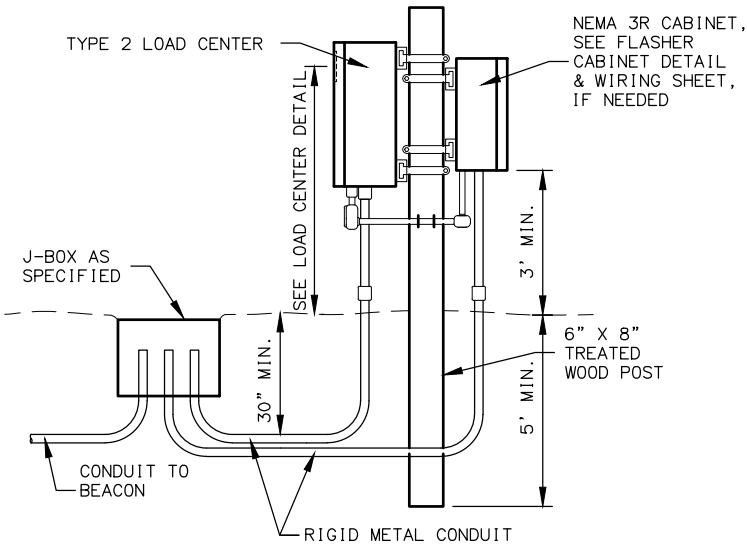
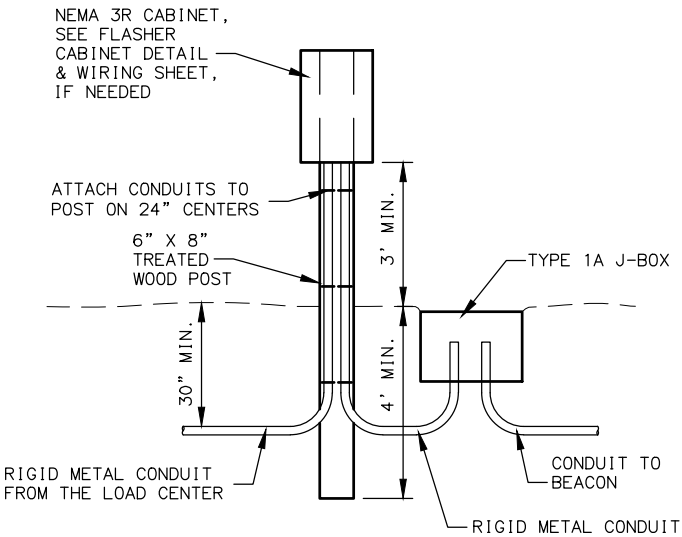


NO.	DATE	REVISION	STATE	PROJECT DESIGNATION	YEAR	SHEET NO.	TOTAL SHEETS
			ALASKA	XXXXXXXX/XXXXXXXXXXXX	20XX	H##	HXX

NOTES:

1. FURNISH BEACON POSTS THAT PROVIDE A 7' DIFFERENCE IN ELEVATION BETWEEN THE BOTTOM OF THE SIGN AND THE EDGE OF TRAVELED WAY. OFFSET CONDITIONS NOT SHOWN ON THIS DRAWING SHALL BE INSTALLED PER STANDARD DRAWING S-05.
2. EQUIP BEACON POSTS WITH FRANGIBLE COUPLING SIGN POST BASES. INSTALL MODEL 5100 BREAK-SAFE BASES FROM TRANSP0 INDUSTRIES OR AN APPROVED EQUAL. FURNISH BRACKETS SIZED FOR EACH SIGN'S CENTROID HEIGHT.
3. FURNISH BEACON POSTS AND PED POLES HOT-DIP GALVANIZED ACCORDING TO AASHTO M111M.
4. FLASHING SIGNAL HEAD SHALL CONSIST OF ONE 12" SIGNAL FACE WITH AMBER L.E.D.S AND TUNNEL TYPE VISORS.

MODEL B-525 BRACKET OPTIONS	
SIGN CENTROID HEIGHT	USE
12' TO 29'	BRACKET NO. 1
9' TO 12'	BRACKET NO. 2
9' & LESS	BRACKET NO. 3

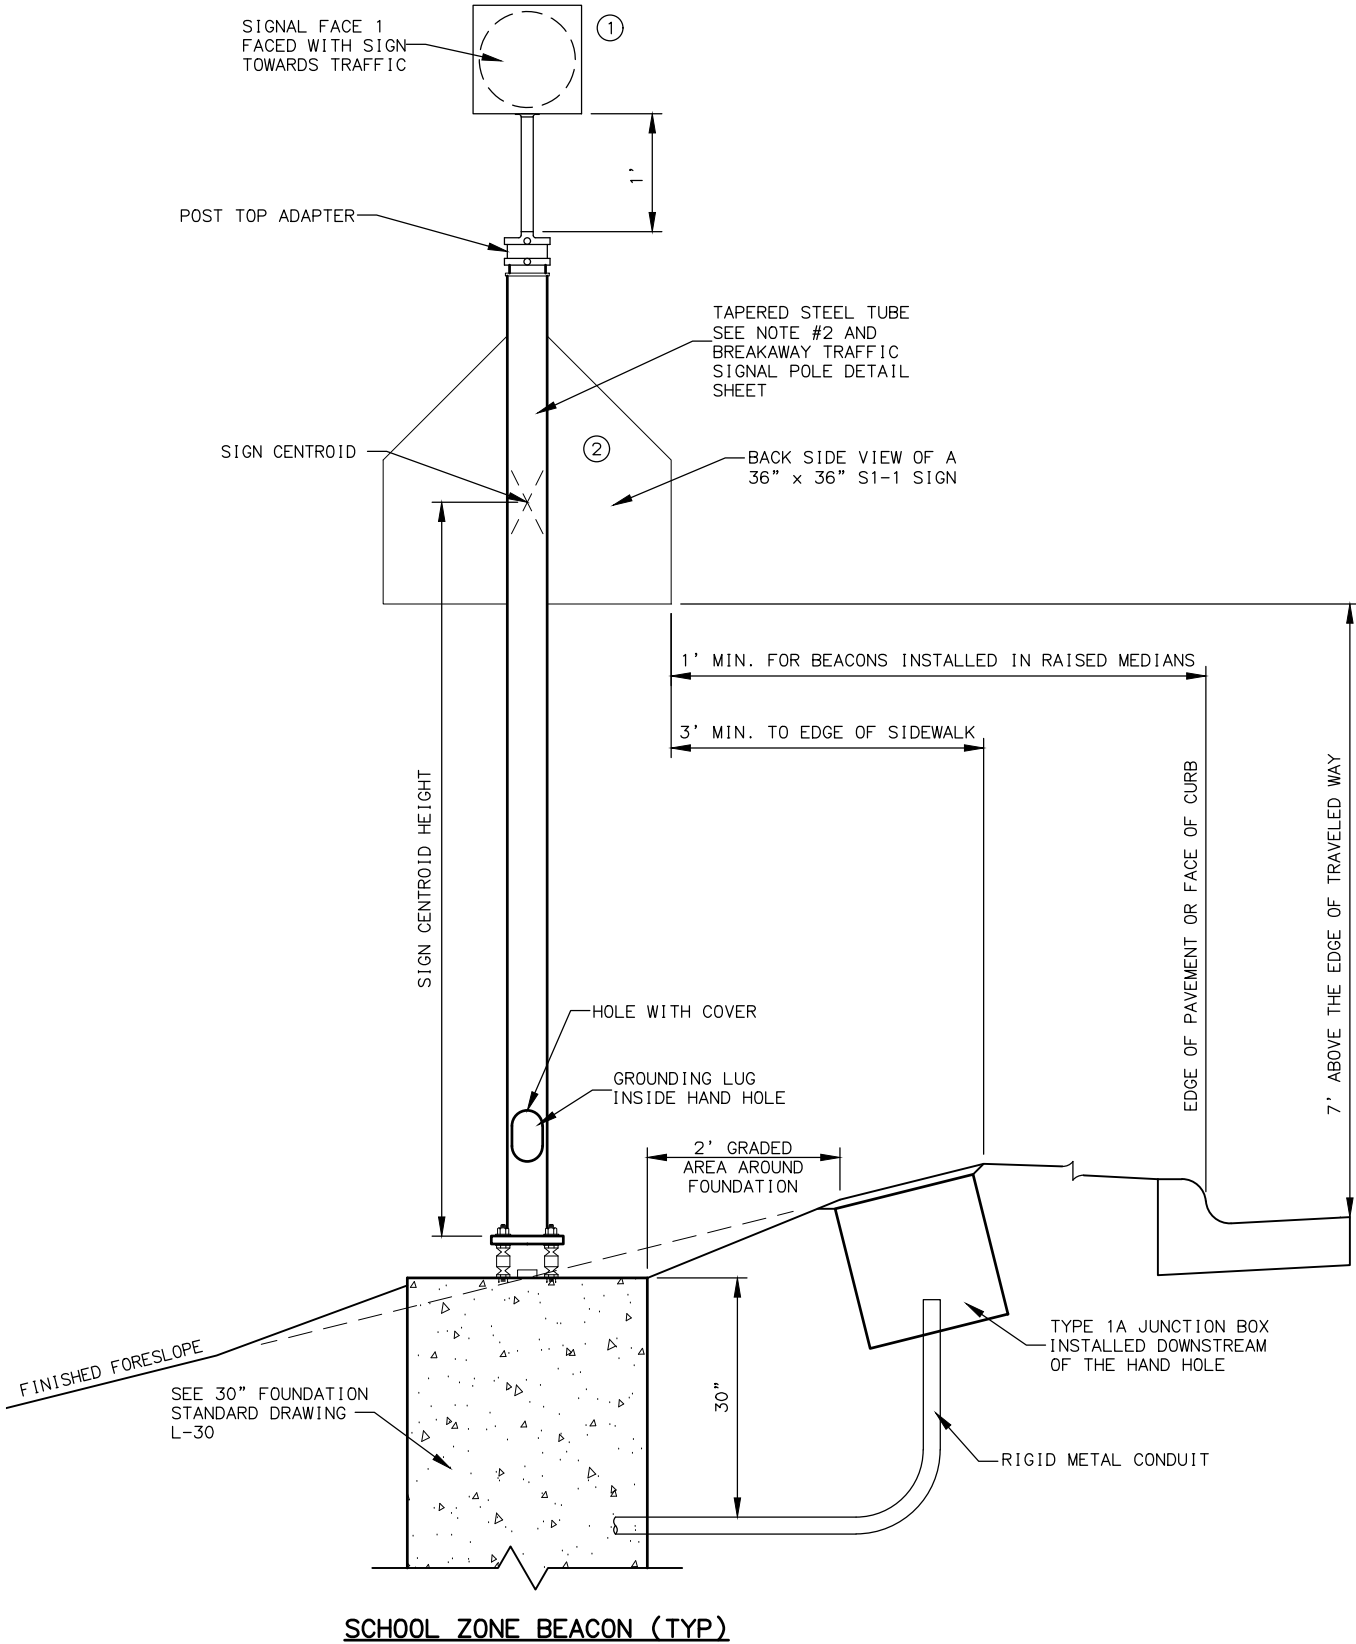

STATE OF ALASKA
DEPARTMENT OF TRANSPORTATION
AND PUBLIC FACILITIES
PROJECT TITLE
PROJECT TITLE

RURAL BEACON DETAILS

STATE OF ALASKA DOT&PF
4111 AVIATION AVENUE
ANCHORAGE, AK 99502
(907) 269-0590