


DRAWING LOCATION
W:\Projects\57436 Unalaska Airport Beach Road\dwg\B.TYPICAL.dwg
DATE
6/21/2004
TIME
3:09:56 PM ADT
LAYOUT
B1
SCALE
N/A
XREFS
N/A
DESIGNED BY
CP
DRAWN BY
LKV/ME

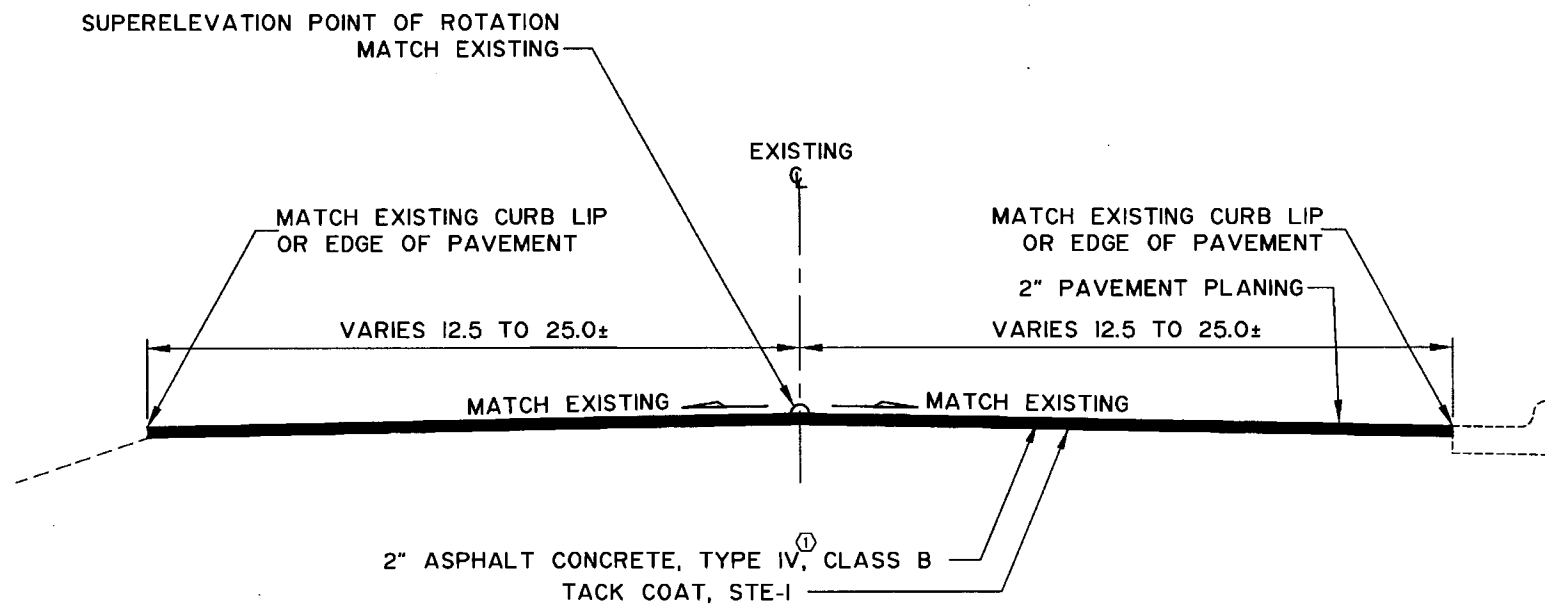

REVISIONS		
NO.	DATE	DESCRIPTION
①	06/22/04	CHANGED PAVEMENT TYPE

STATE	PROJECT DESIGNATION	YEAR	SHEET NO.	TOTAL SHEETS
ALASKA	STP-0310(7)/57436	2004	B1	B1

ADDENDUM NO. 1
ATTACHMENT NO.

NOTES:

1. MATCH EXISTING SUPERELEVATION.
2. PLANE AND PAVING WORK SHALL NOT BE PERFORMED INTO APPROACHES (APPROACHES INCLUDE ROADS THAT TEE INTO AIRPORT BEACH ROAD).
3. TYPICAL SECTION DOES NOT APPLY TO BRIDGE. THIS PROJECT EXCLUDES BRIDGE PAVEMENT WORK.
4. MATCH PAVEMENT ELEVATION AT BRIDGE, APPROACHES, AND CONNECTING STREETS.
5. USE JOINT ADHESIVE WHERE MATCHING EXISTING AND AS SPECIFIED BY ENGINEER



STATE OF ALASKA
DEPARTMENT OF TRANSPORTATION
AND PUBLIC FACILITIES

UNALASKA
AIRPORT BEACH ROAD
PAVING

TYPICAL SECTIONS

DESIGNED BY: CP
CHECKED BY: SURVEY
SCALE: N/A
LAYOUT: CI
DATE: 6/21/2004 3:10:17 PM ADT
DRAWING LOCATION: W:\Projects\57436 Unalakleet Airport Beach Road\dwg\ESTIMATE.dwg

ESTIMATE OF QUANTITIES					
ITEM NO.	PAY ITEM	PAY UNIT	57436 QUANTITY	57539 QUANTITY	TOTAL QUANTITY
202(15)	PAVEMENT PLANING	SQUARE YARD	53,928	19,820	73,748
401(1B)	ASPHALT CONCRETE, TYPE IV; CLASS B (1)	TON	6,109	2,500	8,609
401(2)	ASPHALT CEMENT, PG 52-28	TON	336	138	474
401(5)	ANTI STRIP ADDITIVE	CONTINGENT SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
401(6)	ASPHALT PRICE ADJUSTMENT	CONTINGENT SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
401(9)	JOINT ADHESIVE	LINEAL FOOT	28,913	8,000	36,913
402(1)	STE-1 ASPHALT FOR TACK COAT	TON	11.3	5.0	16.3
404(1)	STE-1 ASPHALT FOR SEAL COAT	TON		9.0	9.0
604(4)	ADJUST EXISTING MANHOLE	EACH	10		10
627(10)	ADJUSTMENT OF VALVE BOX	EACH	18		18
640(1)	MOBILIZATION AND DEMOBILIZATION	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
641(1)	EROSION AND POLLUTION CONTROL ADMINISTRATION	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
641(2)	TEMPORARY EROSION AND POLLUTION CONTROL	CONTINGENT SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
642(1)	CONSTRUCTION SURVEYING	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
642(9)	REFERENCE EXISTING MONUMENT	EACH	46		46
643(2)	TRAFFIC MAINTENANCE	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
643(15)	FLAGGING	CONTINGENT SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
643(23)	TRAFFIC PRICE ADJUSTMENT	CONTINGENT SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
643(25)	TRAFFIC CONTROL	CONTINGENT SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
644(1)	FIELD OFFICE	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
644(2)	FIELD LABORATORY	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
644(8)	VEHICLE	EACH	2		2
644(9)	NUCLEAR DENSOMETER STORAGE	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
646(1)	CPM SCHEDULING	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED
651(1)	EAGLE MONITORING	CONTINGENT SUM	ALL REQUIRED		ALL REQUIRED
670(6)	PREFORMED PAVEMENT MARKINGS	LUMP SUM	ALL REQUIRED	ALL REQUIRED	ALL REQUIRED

604(4) ADJUST MANHOLES		
SHEET NO.	STATION	OFFSET
N2	30+61	RT CURB
N3	39+02	12 LT
N3	42+81	10 LT
N4	48+28	4 RT
N4	63+94	9 LT
N4	71+57	6 RT
N4	75+63	2 LT
N5	77+76	16 RT
N5	85+50	32 RT
N5	88+11	19 RT

627(10) ADJUST VALVE BOXES		
SHEET NO.	STATION	OFFSET
N2	38+96	17 LT
N3	54+65	25 LT
N3	67+76	6 LT
N4	85+33	8 RT
N4	86+60	3 RT
N4	86+64	8 RT
N4	86+69	5 RT
N5	95+34	14 RT
N5	108+02	13 RT
N5	113+19	8 RT
N5	113+54	19 RT
N5	113+64	19 RT
N6	120+11	17 RT
N6	127+93	18 RT
N6	132+37	17 RT
N7	158+52	20 RT
N7	158+54	14 RT

REVISIONS			STATE	PROJECT DESIGNATION	YEAR	SHEET NO.	TOTAL SHEETS
NO.	DATE	DESCRIPTION	ALASKA	STP-0310(7)/57436	2004	C1	C1
(1)	06/22/04	CHANGED PAVEMENT TYPE					

57539
ADDENDUM NO. 1
ATTACHMENT NO.

TABLE OF ESTIMATING FACTORS		
ITEM NO.	ITEM DESCRIPTION	ESTIMATING FACTOR
401(1B)	ASPHALT CONCRETE PAVEMENT, TYPE IV;(1) CLASS "B"	114 LBS. / S.Y. INCH
401(2)	PG 52-28 ASPHALT CEMENT	5.5% WEIGHT OF ASPHALT CONCRETE
402(3)	STE-1 TACK COAT	0.00021 TONS / S.Y.



STATE OF ALASKA
DEPARTMENT OF TRANSPORTATION
AND PUBLIC FACILITIES

UNALASKA
AIRPORT BEACH ROAD
PAVING

ESTIMATE OF QUANTITIES

